



EPSON EB-C1915/C1925W

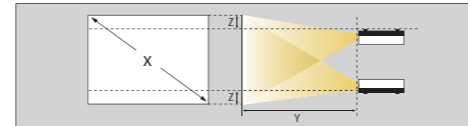

ELPA03
ELPLP53
ELPAF24
USB Key
ELPA06

EPSON EB-C1915/C1925W

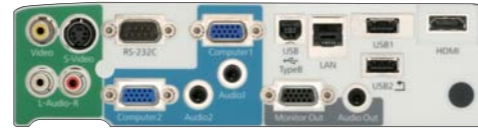

EPSON EB-C1915 (XGA)

4:3		X	Y	Z(
60"/	120cmx90cm 47.2"x35.4"	197	321	8
80"/	160cmx120cm 63"x47.2"	265	430	11
100"/	200cmx150cm 78.7"x59.1"	332	538	14
150"/	300cmx225cm 120"x90"	501	810	21
200"/	410cmx300cm 161.4"x118.1"	670	1081	28
300"/	610cmx460cm 240.2"x181.1"	1007	1624	42

EPSON EB-C1925W (WXGA)

16:10		X	Y	Z(
60"/	125cmx81cm 50.9"x31.8"	187	305	5
80"/	172cmx108cm 67.8"x42.4"	251	408	6
100"/	215cmx135cm 84.8"x53.0"	315	511	8
150"/	322cmx202cm 127.2"x79.5"	476	769	12
200"/	431cmx269cm 169.6"x106.0"	636	1027	16
300"/	646cmx404cm 254.4"x159.0"	956	1542	24

3LCD

3LCD



SVGA XGA IBM
NSF Analog Devices B.V.
* DLP* Texas Instruments /

		EB-C1915	EB-C1925W
LCD	RGB	0.7	0.74
	TFT		
	786432 (1024x 768)x 3		1024000 (1280x 800)x 3
	XGA		WXGA
	1.6		
	F=1.75 - 2.42 / f=24.0 - 38.2mm		
	E-TORL 230W UHE		
	2500		
	30 - 300		
	10:1		15.6:1
4:3	4000		
	2700		
	4000		
	2700		
	2000:1 (1677)		
	10W		
	13.5 MHz - 162 MHz		
	15 kHz - 92 kHz		
	50 Hz - 85 Hz		
	- 45 - +45 - 30 - +30		
- 30 - +30 - 20 - +20			
RGB /	D-Sub 15pin x 2		
	x 2		
	D-Sub 15pin x 1		
	x 1		
	NTSC / NTSC 4.43 / PAL / M-PAL / N-PAL / PAL60 / SECAM		
	RCA() x 1		
	S- Mini Din x 1		
	D-Sub 15-pin x 2		
	RGB D-Sub 15-pin x 2		
	RCA(/) x 1		
HDMI	480i / 576i / 480p / 576p / 720p / 1080i / 1080p		
	TMD5		
	PCM		
	& HDMI x 1		
	HDCP		
	USB /	USB Type B x 1	
	RS-232C(D-sub 9pin x 1)		
	USB /	USB Type A x 2	
	RJ45 x 1 100Mbps		
	5 °C - 35 °C (41 °F - 95 °F)		
2286 (7500) 1500 (4921)			
0			
100 - 240V AC ± 10% 50/60 Hz			
319W(220V-240V) 0.3W			
(D x W x H)	257x 357x 86mm		
3.5KG / 7.82			
/	37dB / 29dB		

1.8	*1	
1.8 m D- sub 15pin		
USB 3		
AA x2	*2 ISO21118	80% Wide
	*3	

89 7 100005
www.epson.com.cn 400-810-9977
010-82696006
020-87511200
4S www.epson.com.cn/4s

EPSON EB-C1915/C1925W



- 4000
- 3.5
-
-
-



EPSON EB-C1915/C1925W



EPSON EB-C1915 / C1925W

4000
3.5




"Screen Fit"



A/V Mute

A/V Mute

A/V Mute

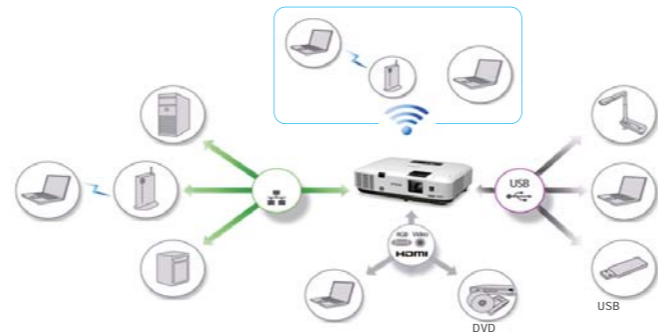


Connection Key
Quick Wireless PC



USB

USB

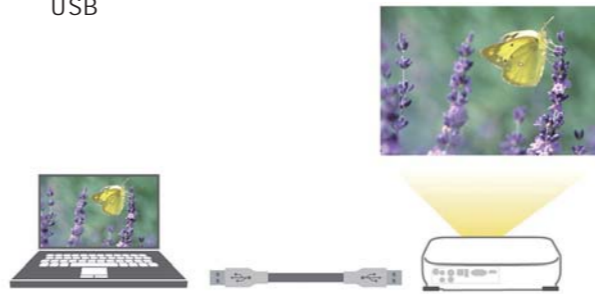

USB



* jpeg PowerPoint™ converted scenario




EasyMP Monitor & Control

HDMI

DVD

E-TORL

E-TORL (E-TORL Epson-Twin Optimize Reflection Lamp)

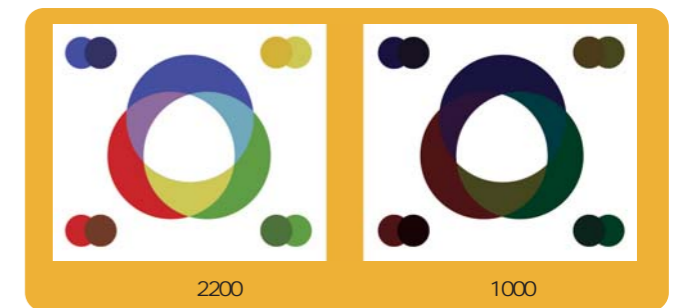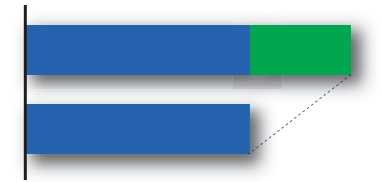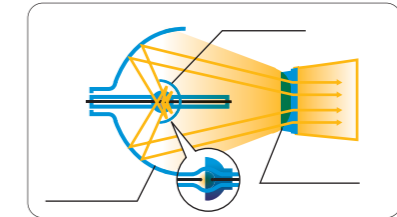

- 1)
- 2)
- 3)
- 4)

